



COPPER/STAINLESS STEEL







SEALED RIVET Dome head

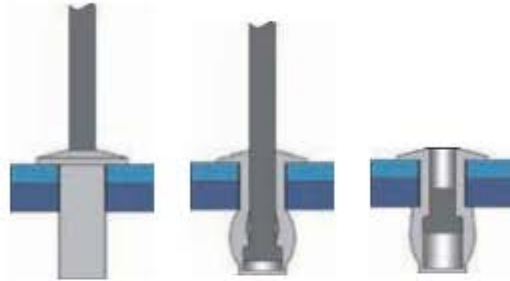

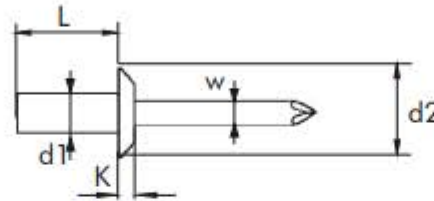BODY: Copper

MANDREL: Stainless Steel



d1 Ø mm	L Nominal mm	 mm	d2 Ø mm	K mm	W Ø mm	PACKAGING		 E mm MIN. MÁX.	 (N)	 (N)	REFERENCE
						 Inner	 Outer				
3,2	6,5	3,30	6,30	1,40	1,70	500	4.000	0,5 - 2,0	1250	2100	01329003206
	8,0					500	4.000	2,0 - 3,5			01329003208
	9,5					500	4.000	3,5 - 5,0			01329003209
4,0	8,0	4,10	8,00	1,40	2,20	500	4.000	0,5 - 3,5	1900	2500	01329004008
	10,0					500	4.000	3,5 - 5,0			01329004010

Tests according to EN ISO 14589

